

JS-7 Series




Introduction

JS-7 series Interconnect box integrates the box body and various interfaces to provide an orderly, simple and compact conference connection solution. It uses pneumatic movement and mechanical latching mechanism to conceal the interfaces, such as for the power supply, network, phone, video, audio, PC video, switchboard, USB and so on, for the users to power the device and connect the signals. Open, press the top panel slightly, the panel of the Interconnect box will automatically prop up at 45° and various interfaces are shown up before the users. Close, press the top panel slightly, the Interconnect box will automatically retract to level with the table surface after retracted.

Product Features


- When open, the panel of the interconnect box will be automatically propped up at 45°;
- Durable pneumatic movement and mechanical latching mechanism;
- RJ-45 interface should be used in network, data, phone connector (CAT.5/CAT.6);
- With 1.7m cable;
- Top surface available in brushed black or silver finishes, custom finishes is accepted;
- Insert plates can be changed, customized;
- Various cables and connections, can meet many demands
- CCC Certificate Number: 2013010201596383
- CE Certificate Number: N° VTUPV-269/2011ZAGR
- ROHS Certificate Number: W02171017304C

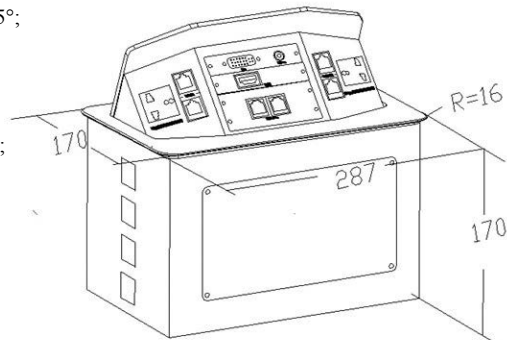

Overall Dimension (mm)

Main Specifications

Model	JS-7
Table Thickness	Maximal 60mm, 125mm(to be connected to extended part)
Temp. range	0 ~ 50°C (Non-condensing)
Weight	About 4.5kg
Dimensions	Panel: 287mm*170mm R=16mm Cutout Dimension: 277mm*162mm R=11mm Package: 340mm*220mm*270mm

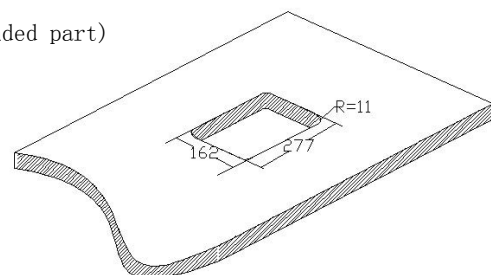

Cutout Dimension (mm)